


Electric Curtain Tracks




 **SilentGliss**[®]



Electric Curtain Track System

Silent Gliss® 5600 Electric Curtain Track

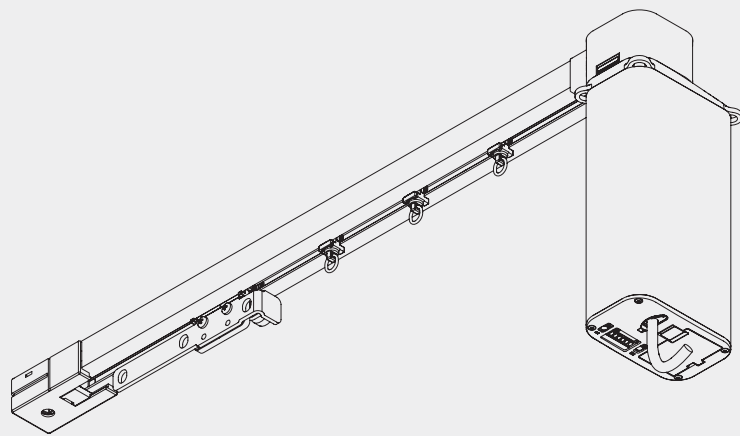


Product Information

- The world's most silent curtain track system.
- Very elegant and premium appearance.
- Applicable for contract as well as residential use.
- New roller technology enables a very smooth operation (patent pending).
- All regular curtain heading systems as well as Wave option apply with Silent Gliss 5600.
- Strong motor for AC (90-260V) and DC (24V) applications.
- Automatic end stop programming.
- Easy manual end stop programming.
- Motor can be equipped with modular radio receiver and can be combined with radio remote control system Silent Gliss 9940.
- „Touch and Go“ and integrated manual override offer easy operation.
- Permanent positioning sensor to keep endpositions even without power.
- The maximum size of the system depends on fabric weight and application.
- Stacking: single and pair stacks. For symmetric applications.
- Large and attractive fabric offer.
- Easy ceiling, wall and recess fix. Bendable recess profile available. Profile can also be fixed directly onto ceiling without brackets.
- The motor can be rotated into four different directions and also be mounted above the profile for maximum flexibility.
- The minimum bending radius is 25 cm.
- Standard colour: white and aluminum silk-matt.




5600


Profile and Bending Information




10850




Recess Profile for Suspended Ceilings



10862



How to Measure

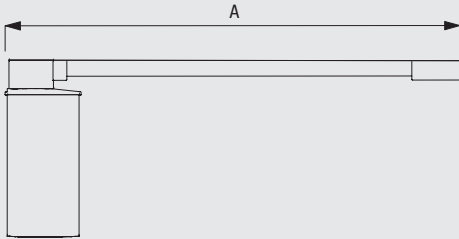

A: System width

System Dimensions



15 m



65 kg
Max. 1 kg per roller

Max. Curtain Weight Charts

Application with Rollers and Wave Rollers

	2 m	4 m	6 m	8 m	10 m	12 m	15 m	18 m	21 m	25 m
	25	45	45	50	65	45	45	45	45	40
	25	45	45	50	65	45	45	45	45	40
	25	35	35	40	35	35	35	32	29	25
	25	35	35	40	35	35	35	32	29	25
	25	30	30	30	25	25	22	19	15	-
	25	30	30	30	25	25	22	19	15	-
	20	20	20	18	16	12	10	-	-	-
	20	20	20	18	16	12	10	-	-	-

(kg max.)

5600

Application with Wave Gliders


	2 m	4 m	6 m	8 m	10 m	12 m	15 m
	20	25	25	25	20	10	-
	20	25	25	25	20	10	-
	20	20	20	20	15	-	-
	20	20	20	20	15	-	-
	20	20	20	15	10	-	-
	20	20	20	15	10	-	-
	20	20	15	8	-	-	-
	20	20	15	8	-	-	-

(kg max.)


It is essential with electrically operated curtain tracks to choose a system which can readily cope with the specific demands placed on it. The most crucial factor is the total weight of the curtains transported by it, but then come further questions such as how the curtains are stacked, are there bends involved, ceiling or wall fix, the type of curtain heading etc.

System Options


Radio Remote Control System Silent Gliss 9940

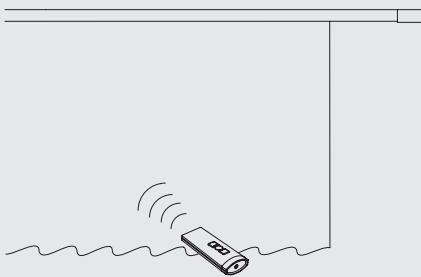

Optional, modular radio receiver Silent Gliss 9063 is available for motor Silent Gliss 9060. Combined with the Radio Remote Control System Silent Gliss 9940, this system offers maximum comfort with minimum wiring. For further details, please refer to product group „Motors & Controls“.



Silent Gliss App „Move“

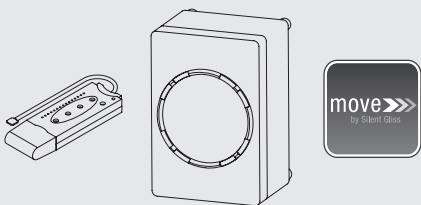


The system can be controlled with the Silent Gliss app „Move“ through a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.


The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, Move Server Set Silent Gliss 9960 is required.

For further details, please refer to product group „Motors & Controls“.


Wave Curtain Heading System



The Wave is an exciting contemporary curtain heading system which allows curtains to hang in a continuous wave which is smooth, simple and elegant.

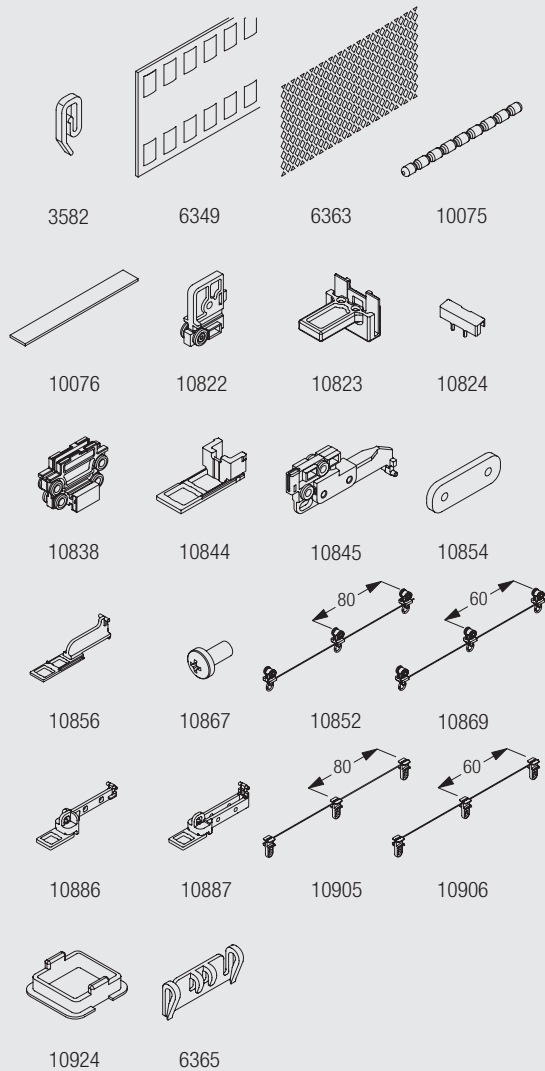


- 3582 Hook
- 6349 Curtain tape
- 6363 Iron tape
- 10075 Lead weight 50 gr/m
- 10076 Fabric weight
- 10822 Master carrier set
- 10823 Belt connector arm
- 10824 Belt connector pin
- 10838 Pilot runner set
- 10844 Motor end stop
- 10845 Wave master carrier, single stack 80 mm
- 10852 Wave roller cord (80 mm)
- 10869 Wave roller cord (60 mm)
- 10854 Wave overlap arm support
- 10856 Wave end stop, belt return
- 10867 Panhead screw
- 10886 Wave overlap arm, pilot runner
- 10887 Wave overlap arm set
- 10905 Wave glider cord (80 mm)
- 10906 Wave glider cord (60 mm)
- 10924 Wave glider support



Fitting Information


For all electrically operated curtain track systems, a connection point should be made available at a distance of no greater than 1 metre from the motor. This should be discreetly situated behind the curtain, taking care that the motor will not obstruct access to the socket.

Bracket and Profile Positioning

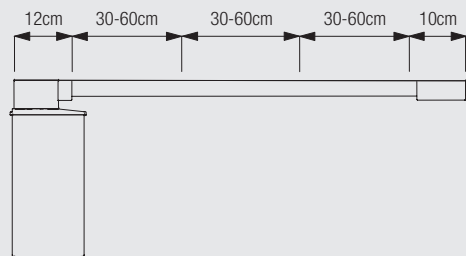


Higher edge of profile to the room side.

Motors can be Recessed in Hollow Ceilings

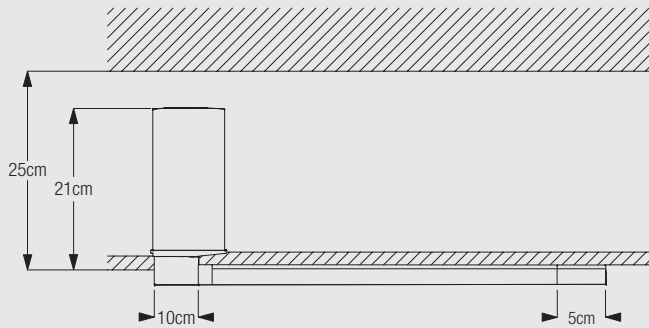

With profile surface mounted with clamp 3004 on the ceiling.

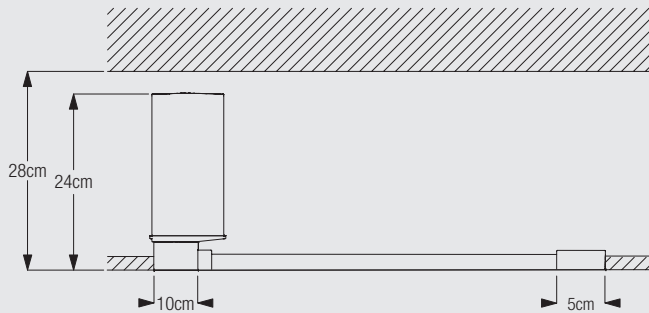





With profile 10862 recessed into ceiling.

Where the system is to be fitted to the ceiling, (recommended in most cases), the surface must be absolutely flat. Any unevenness will cause problems in fitting the clamps and will almost certainly affect the functioning of the system.



Fitting Options

CAD download through Silent Gliss Intranet/e-catalogue


Ceiling fitting with direct mounting

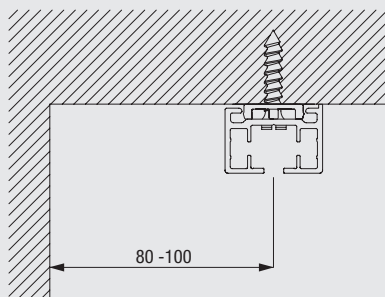



Ceiling fitting with clamp 3004

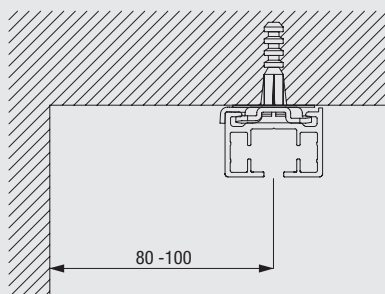

Wall fitting with Smart Fix 11200-11205 and bracket 3041

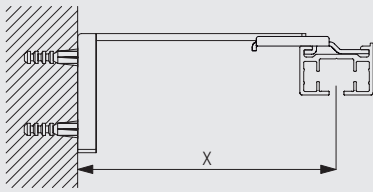


	X (mm)
11200	83
11201	103
11202	123
11203	143
11204	173
11205	223




Brackets feature thread for screw SG 10492 (M4x8) for fixing bracket SG 3041.

Wall fitting with Smart Fix 11201-11205 and clamp 3004




	X (mm)
11201	72
11202	92
11203	112
11204	142
11205	192





Brackets feature thread for screw SG 10074 (M4x8) for fixing clamp 3004.

Wall fitting with Square Smart Fix 11210-11215 and bracket 3041

5600

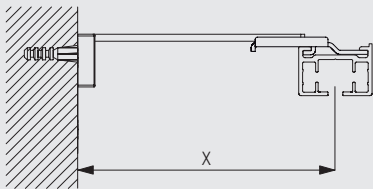


	X (mm)
11210	83
11211	103
11212	123
11213	143
11214	173
11215	223




Brackets feature thread for screw SG 10492 (M4x8) for fixing bracket SG 3041.

Wall fitting with Square Smart Fix 11211-11215 and clamp 3004




	X (mm)
11211	72
11212	92
11213	112
11214	142
11215	192




Brackets feature thread for screw SG 10074 (M4x8) for fixing clamp 3004.

Wall fitting with Universal Smart Fix 11154-11156 and bracket 3041

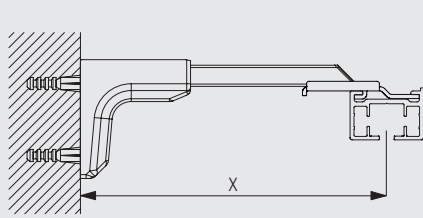

	X (mm)
11154	128-156
11155	158-186
11156	208-236




11154-56
Universal Smart Fix
(120-200 mm sets)




3041
Bracket

Brackets feature thread for screw SG 10407 (M4x10) for fixing bracket SG 3041.

Wall fitting with Universal Smart Fix 11154-11156 and clamp 3004

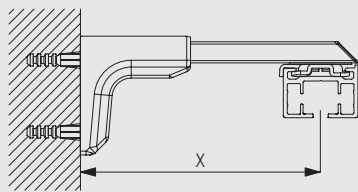

	X (mm)
11154	102-130
11155	132-160
11156	182-210






11154-56
Universal Smart Fix
(120-200 mm sets)




3004
Clamp

Brackets feature thread for screw SG 11158 (M4x12) for fixing clamp 3004.


Recess fitting with recess profile 10862

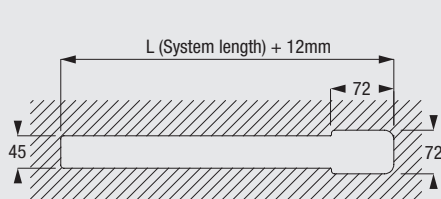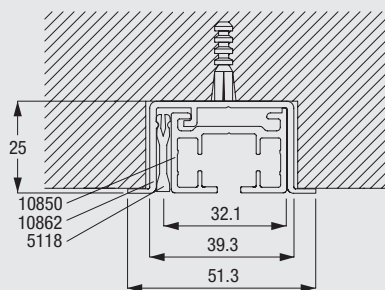


5118
Wedge




10862
Recess profile



10863
Recess mask, motor















10864
Recess mask, belt
return



5600


Standard Accessories

3004	Clamp		9060	Motor 100-250 V AC & 24 V DC	
10815	Cover		10816	Motor cover	
10817	Motor case holder		10819	Belt return set	

10820	Overlap arm, straight		10821	Overlap arm, bent	
10822	Master carrier set		10825	Belt	
10826	Overlap arm support set		10831	Connecting bridge	
10836	Mask pair stack		10837	Pilot runner arm	
10838	Pilot runner set		10840	Two component roller	
10850	Profile		10923	Pan head screw M4x12	



Optional Accessories

3041	Bracket		5118	Wedge	
9063	Radio module set		10862	Recess profile	
10863	Recess mask, motor		10864	Recess mask, belt return	
10865	Mounting support plate		10957	Overlap arm long, straight	
11154	Universal Smart Fix, 120 mm set		11155	Universal Smart Fix, 150 mm set	
11156	Universal Smart Fix, 200 mm set		11200	Smart Fix, 60 mm set	
11201	Smart Fix, 80 mm set		11202	Smart Fix, 100 mm set	
11203	Smart Fix, 120 mm set		11204	Smart Fix, 150 mm set	
11205	Smart Fix, 200 mm set		11210	Square Smart Fix, 60 mm set	
11211	Square Smart Fix, 80 mm set		11212	Square Smart Fix, 100 mm set	
11213	Square Smart Fix, 120 mm set		11214	Square Smart Fix, 150 mm set	
11215	Square Smart Fix, 200 mm set				



5600


Sewing and Wave Accessories

3582	Hook		6349	Curtain tape	
6363	Iron tape		10075	Lead weight 50 gr/m	
10076	Fabric weight		10822	Master carrier set	
10823	Belt connector arm		10824	Belt connector pin	
10838	Pilot runner set		10844	Wave end stop, motor	
10845	Wave master carrier, single stack 80 mm		10852	Wave roller cord (80 mm), 6.5 mm channel	
10854	Wave overlap support arm		10856	Wave end stop, belt return	
10867	Panhead screw M4x16		10869	Wave roller cord (60 mm), 6.5 mm channel	
10886	Wave overlap arm, pilot runner set		10887	Wave overlap arm set	
10905	Wave glider cord (80 mm), 6.5 mm channel		10906	Wave glider cord (60 mm), 6.5 mm channel	
10924	Wave glider support				



5600


Motor 9060 (100-250 V AC & 24 V DC)

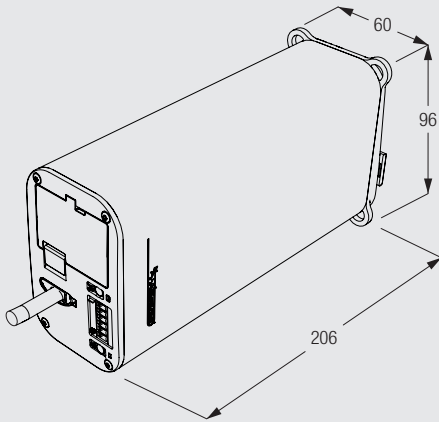

- Voltage: 100-250 V AC
- Frequency: 50-60 Hz
- Current: 1.3 / 0.5 A
- Speed: 160 / 120 rpm
- Noise level: < 36 dBA
- Thermal overload protection
- ETL/UL, CE/IECEE Standard
- Weight: 1.4 kg


Operating Methods

Combination of wall switch and multiple motors over the mains

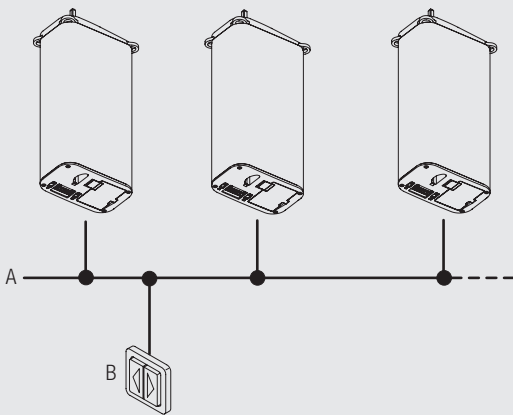


- A: 100-250 V AC
- B: 100-250 V AC simultaneous

The "Open-Close" function can only be operated by maintained switch. Electronic operation with "Open-Close" at any desired position. Up to 5 systems can be operated via mains connections without relays. More than 5 systems can be operated via mains connections only with relays.




Combination of wall switch and multiple motors over low voltage inputs

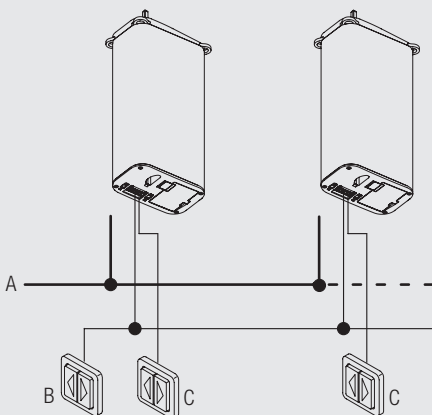

- A: 100-250 V AC
- B: Low Voltage simultaneous
- C: Low Voltage individual


Electronic operation with „Open-Close“ at any desired position. Simultaneous and/or individual operation of single or multiple systems, by low voltage switch. Up to 15 systems can be operated via low voltage.

Radio Remote Control System Silent Gliss 9940

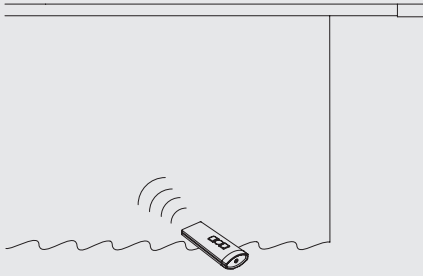

Motor Silent Gliss 9060 can be equipped with modular radio receiver Silent Gliss 9063 and combined with Radio Remote Control System Silent Gliss 9940. For further details, please refer to catalogue section „Motors & Controls“.

Silent Gliss App „Move“

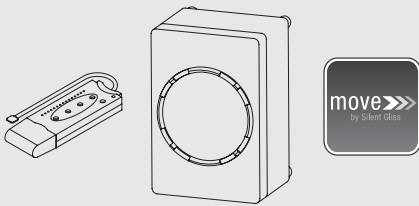

The system can be controlled with the Silent Gliss app „Move“ through a smartphone, tablet or desktop.

Whether at home or on the road, this reliable and intuitive app allows to program automatic opening and closing times. Furthermore, automatic sunrise and sunset time programming and groups and moods are possible.

The app is available for Android, IOS and Windows and can be downloaded in the respective app stores. Additionally, Move Server Set Silent Gliss 9960 is required.

For further details, please refer to product group „Motors & Controls“.

Wiring and Connections

For other operating / wiring methods, please see section Motors & Controls or contact Silent Gliss.

