


Cord Operated Curtain Track Systems





Heavy Duty and Stage Curtain Track System

Silent Gliss® 6370

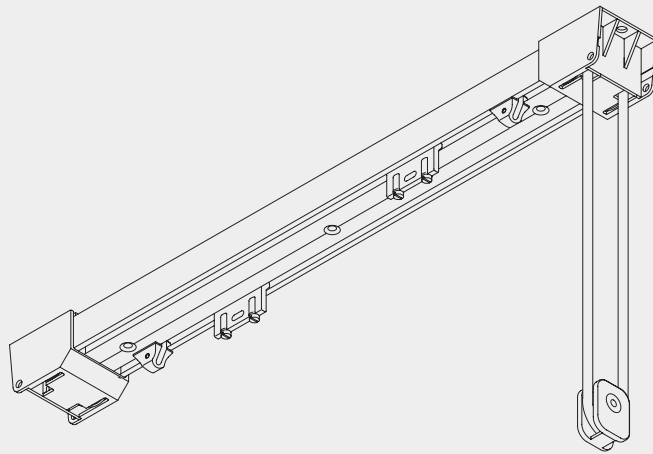



Product Information

- Discreet heavy-duty track system with twin channel for infinite overlap
- Cost effective system for small stages, very heavy contract and domestic use etc
- Heavy curtains up to 70kg, and width up to 15m
- Simple direct fixing, ceiling fix preferred. Drilled at approximately 500mm centres
- Profile available in 4, 5 and 6 metre lengths
- Satin silver finish as standard
- Can be bent



6370


Profile, Bending and Specification Information



Specification Information - download from www.silentgliss.co.uk (password required).

Silent Gliss 6370 curtain track, cord operated, assembled complete with roller gliders 6098 at 10/m. cord 6070 right-hand side, ceiling fixed through profile at 500mm centres plus endpieces, each one screwed to timber/plugged and screwed to brickwork/concrete.Lm in lengths.


How to Measure

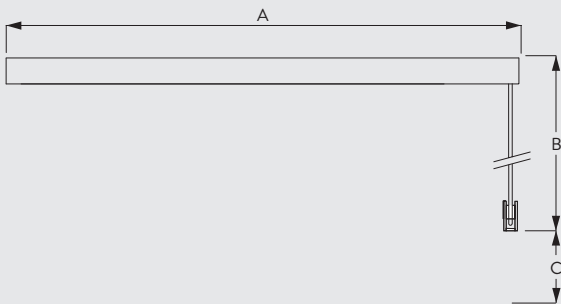


A: system width
 B: cord height
 C: cord retainer 10400 must be installed at least 150cm above the floor
 (ref: EN13120 Child Safety)

System Dimensions

6370



15 m



70 kg

Maximum curtain weight chart (with roller)

	3 m	6 m	9 m	12 m	15 m
	65	60	55	50	45
	70	65	60	55	50
	48	42	36	31	26
	54	48	42	36	30
	38	32	27	22	18
	44	38	32	27	22
	24	15	5	-	-
	27	19	10	-	-


(kg max.)

Fitting Information

WARNING

Young children can be strangled by loops in pullcords, chains, tapes and inner cords that operate the product. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords. Do not tie cords together. Make sure cords do not twist to create a loop.

Bracket positioning

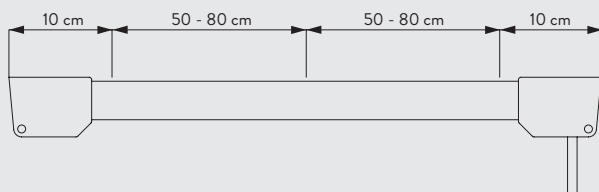

The fixing distances above are meant as a guide only, they may vary in practice depending on surface and curtain weight. For particularly heavy curtains the maximum recommended distance is 500mm.




6370


Fitting Options

CAD download through Silent Gliss website (password required) www.silentgliss.co.uk


Direct to ceiling fix through profile




Recess fix through profile

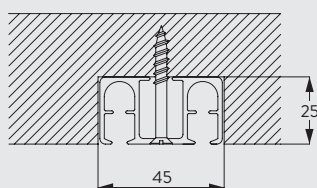


Wall fitting with Universal Smart Fix 11154-11156

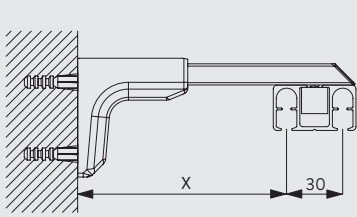

	X (mm)
11154	87-115
11155	117-145
11156	167-195



11154-56
Universal Smart Fix
(120-200 mm)



6369
Insert

Brackets feature thread for screw M5x20 for fixing nut SG 6369. Universal Smart Fix only with open channel downside

Standard Accessories

18R	Screw 25mm. No. 8 roundhead		
6070	Cord (ø 6mm)		
6086	Spring stop		
6098	Roller glider with eye		
6214	Adjustable pilot (white)		
6227	Master pilot runner (grey)		
6371	Profile		
6377	Endpiece set (2 part)		
10400	Safety Cord Retainer		
1128C	Countersunk screw		

Optional Accessories

6370

6007	Endstop		
6079	Overlap arm		
6094	Roller glider with hook		
6369	Insert		
6376	Connecting bridge		
11154	Universal Smart Fix, 120 mm set		
11155	Universal Smart Fix, 150 mm set		
11156	Universal Smart Fix, 200 mm set		

Sewing Information and Accessories




Diagram uses standard roller 6098 measured to the inside of the glider eye. For optional rollers substitute the dimensions below:

6094 = 31mm

3582 Hook



3599 Hook



6370